





LV1

LV2

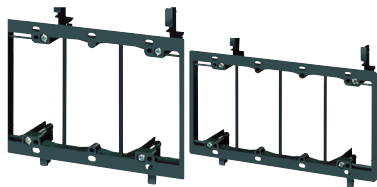


LV3

LV4



LV1



LV2

Low Voltage Mounting Brackets

Single through 4-gang brackets for installations on existing construction. Designed to install low voltage Class 2 only.

| CATALOG NUMBER | UPC/DCI/NAED MFG #018997 | UNIT PKG | STD PKG | DIM A | DIM B | DIM C | DIM D | DIM E |
|----------------|--------------------------|----------|---------|-------|-------|-------|-------|-----------|
| LV1 | 58175 | 10 | 100 | 5.460 | 4.250 | 2.500 | 1.700 | 1/4" - 1" |
| LV2 | 10952 | 5 | 50 | 5.460 | 4.250 | 4.185 | 1.700 | 1/4" - 1" |
| LV3 | 09600 | 5 | 50 | 5.460 | 4.250 | 6.000 | 1.700 | 1/4" - 1" |
| LV4 | 09601 | 5 | 50 | 5.460 | 4.250 | 7.810 | 1.700 | 1/4" - 1" |



E253895 LR49636

DIM E refers to wall thickness adjustment.


FEATURES AND BENEFITS

- Non-metallic, better than metal and costs less too!
- For communications, cable TV, computer wiring.
- Bracket is its own template for cut out
- Mounting wings hold bracket securely against wall when screws are tightened
- Adjusts to fit 1/4" to 1" thick wallboard, paneling, or drywall
- Cat 5 listed

Scan For Video



LOW VOLTAGE FIRE ALARM INSTALLATIONS



Arlington's LV2, for existing construction, and LVMB2, for new construction (see pg. O-4), can also be used for the installation of fire alarms.

FINISHED INSTALLATION



Locate bracket position. Level. Trace inside of LV1 and cut on the outside of the line.