


Zinc Die-Cast Low Profile Strain Relief Cord Connectors

Zinc die-cast. Liquid tight. Oil tight. Furnished with sealing ring and locknut.

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	TRADE SIZE	CORD RANGE	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
LPCG503Z*	50352	1/2	.100 - .360	25	100	1.792	.595	.978
LPCG50Z	36110	1/2	.200 - .485	25	100	1.792	.595	.978
LPCG507Z	50356	1/2	.385 - .600	25	100	2.250	.595	1.230
LPCG753Z*	36105	3/4	.100 - .360	10	50	1.963	.595	.978
LPCG754Z	50764	3/4	.200 - .485	10	50	1.963	.595	.978
LPCG757Z	50766	3/4	Grommet A - .385 to .600 Grommet B - .600 to .750	10	50	2.250	.595	1.230



*UL not applicable for cords under .200" diameter, wire strength will not meet UL 35 lb test requirements for the fitting.

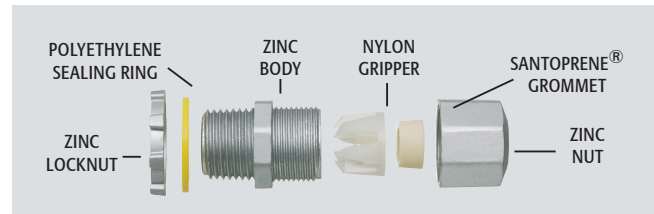

Scan for Video

