



930 ships as LB

Converts to a...



C





LL



LR



T

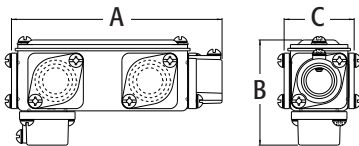

Scan For Video



## AnyBODY™ Conduit Bodies

Five conduit bodies in one! Ships as an LB, but converts to a T, LL, LR, or C. Switch covers and threaded flanges as needed to create the style you need. Copper free aluminum die-cast.

*Combination threaded IMC or rigid and set screw EMT.*

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	TRADE SIZE	CUBIC INCHES	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
930	17900	1/2	4.80	10	10	5.111	2.520	1.670
931	17901	3/4	7.80	10	10	5.640	2.770	2.020
932	17902	1	11.50	5	5	6.530	3.280	2.160
933	17903	1-1/4	32.30	2	10	8.550	4.020	2.980
934	17904	1-1/2	32.30	2	10	8.550	4.020	2.980
935	17905	2	69.50	1	5	10.730	4.670	3.500



Refer to page H-2 for flange illustration.

*Threaded only for IMC or rigid.*


CATALOG NUMBER	UPC/DCI/NAED MFG #018997	TRADE SIZE	CUBIC INCHES	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
936	17906	2-1/2	175.50	1	1	13.900	5.970	4.800
937	17907	3	175.50	1	1	14.340	6.400	4.800
938	17908	3-1/2	334.00	1	1	16.840	7.330	5.840
939	17909	4	334.00	1	1	16.840	7.330	5.840



### FEATURES AND BENEFITS

- Meets NEC 2020 Section 314.16 Paragraph (C) (2) for conduit bodies with splices, taps, or devices
- Saves the time, space, and cost of stocking five different conduit bodies (LB, T, LL, LR, C)
- 1/2" to 2" sizes are combination EMT/rigid: they're threaded for rigid, with a set screw for use with EMT.
- Convenient and easy to use
- Includes threaded flanges for three openings
- Volume and wire fill marked inside bodies
- Recessed O-rings under covers and flanges

### 930 1/2" ANYBODY SHOWING CONVERSION TO LR

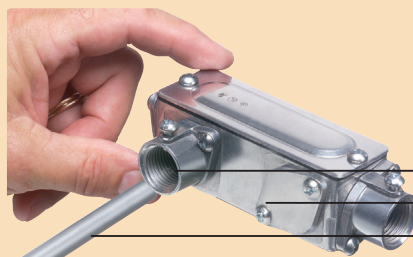

1. Remove cover plate.
2. Remove threaded flange.
3. Reinstall cover plate and flange in the appropriate opening to convert AnyBODY to the desired configuration.

Threaded Flange  
Cover Plate  
Screwdriver


### Combination Threaded and Set Screw Conduit Bodies

AnyBODY™ conduit bodies, #'s 930 - 935, whether in T, LB, C, LR, or LL configurations have combination flanges which are threaded for rigid and include set screws for EMT.


The set screws may be used for rigid, but are not necessary. They are listed rain tight with rigid and concrete tight for EMT. These products can also be used for EMT to rigid.



**Flange Illustration**




Shown with Rigid



Shown with EMT

**Recessed O-Ring Illustration**

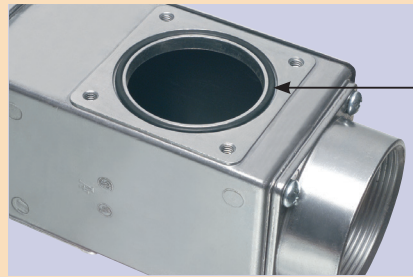

Seated O-rings on all Metallic AnyBODY™ Conduit Bodies maintain liquid tight seal!  
(Note: cover removed)

CATALOG NUMBER	TRADE SIZE	VOLUME	WIRE SIZE(QUANTITY & GAUGE)			
			LB	LL/LR	C	T
930	1/2	4.8	--	--	--	--
931	3/4	7.8	--	--	--	--
932	1	11.5	(3) #4 AWG	(3) #4 AWG	(3) #4 AWG	(3) #4 AWG
933	1-1/4	32.3	(3) #2 AWG	(3) #2 AWG	(3) #2 AWG	(3) #2 AWG
934	1-1/2	32.3	(3) #1 AWG	(3) #1 AWG	(3) #1 AWG	(3) #1 AWG
935	2	69.5	(3) #2/0 AWG	(3) #2/0 AWG	(3) #2/0 AWG	(3) #2/0 AWG
936	2-1/2	175.5	(3) #250 MCM	(3) #250 MCM	(3) #250 MCM	(3) #250 MCM
937	3	175.5	(3) #250 MCM	(3) #250 MCM	(3) #250 MCM	(3) #250 MCM
938	3-1/2	334.0	(3) #350 MCM	(3) #350 MCM	(3) #350 MCM	(3) #350 MCM
939	4	334.0	(3) #350 MCM	(3) #350 MCM	(3) #350 MCM	(3) #350 MCM

CATALOG NUMBER	TRADE SIZE	VOLUME	WIRE SIZE(QUANTITY & GAUGE)			
			LB	LL/LR	C	T
930NM	1/2	4.5	--	--	--	--
931NM	3/4	8.5	--	--	--	--
932NM	1	12.0	(3) #4 AWG	(3) #4 AWG	(3) #4 AWG	(3) #4 AWG
933NM	1-1/4	33.5	(3) #2 AWG	(3) #2 AWG	(3) #2 AWG	(3) #2 AWG
934NM	1-1/2	33.5	(3) #1 AWG	(3) #1 AWG	(3) #1 AWG	(3) #1 AWG
935NM	2	65.3	(3) #2/0 AWG	(3) #2/0 AWG	(3) #2/0 AWG	(3) #2/0 AWG
936NM	2-1/2	194.0	(3) #250 MCM	(3) #250 MCM	(3) #250 MCM	(3) #250 MCM
937NM	3	194.0	(3) #250 MCM	(3) #250 MCM	(3) #250 MCM	(3) #250 MCM
938NM	3-1/2	369.0	(3) #350 MCM	(3) #350 MCM	(3) #350 MCM	(3) #350 MCM
939NM	4	369.0	(3) #350 MCM	(3) #350 MCM	(3) #350 MCM	(3) #350 MCM