




## SliderBar™ Boxes and SliderBar™ Box Kits

Fits between studs spaced 12" to 18" apart, and allows you to position one or multiple boxes where you need them in the stud cavity.

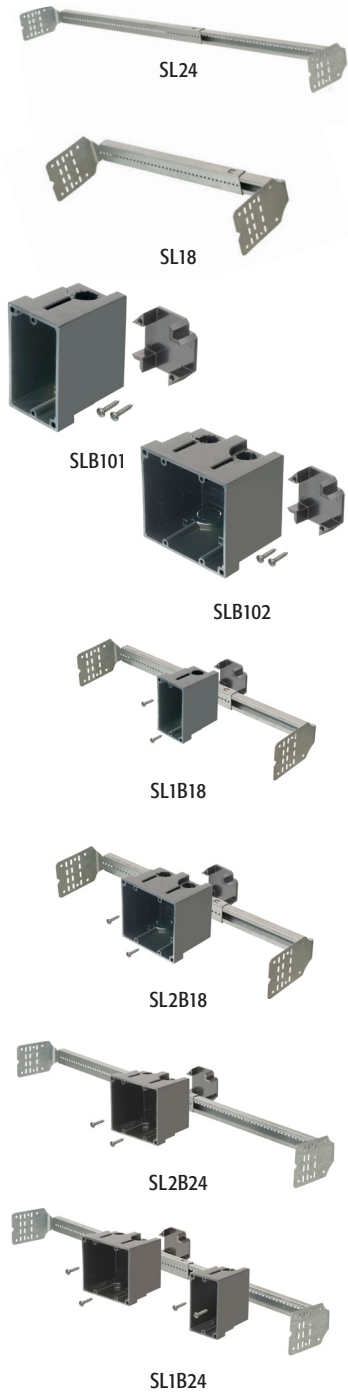

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	UNIT CTN	STD CTN	DIM A	DIM B	DIM C	DIM D
SL18	00929	25	25	10.5" Min 17" Max	3.846	2.375	--
SLB101	00930	25	25	3.610	3.000	.715	--
SLB102	00931	10	10	3.620	3.000	3.725	--
SL1B18	00932	10	10	10.188	2.225	3.715	2.375
SL2B18	00933	10	10	10.188	4.125	3.725	2.375
SL1B24*	00921	10	10	14.250	4.125	3.725	2.375
SL2B24*	00922	10	10	14.250	2.225	3.715	2.375
SL24*	00920	25	25	15" Min 24" Max	3.900	2.375	--



- ### FEATURES AND BENEFITS
- Bending guides on bracket ends assure proper positioning on studs.
  - Sliderbar and boxes sold separately
  - SLIDERBAR/Box Kits include a single or two gang non-metallic box. Non-metallic boxes rated for NM Cable, NMB-PCS and NMD90 in Canada.
  - When using a metal box SLIDERBAR is rated for non-metallic as well as MC, AC and FMC cable. Metal boxes not included.

- ### \*KIT INCLUDES
- Kits include slider bar, box, screws for box to bar attachment, slider clip

