




FD1RP



FD2RP

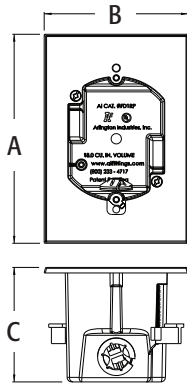

## One Piece Non-Metallic Boxes

Single and 2-gang boxes for retrofit installations. Provides fast installation with a hole saw.

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	DESCRIPTION/ ATTACHMENT	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
FD1RP	75229	Single-gang/18.0 cu. in. /3.5" dia. hole saw	25	25	5.635	3.885	3.085
FD2RP	75301	2-Gang/31.0 cu. in. /4.5" dia. hole saw	10	10	5.704	5.454	2.938



**PATENTED.**

**MADE IN USA.**

Add suffix "GC" to Catalog # when ordering from Canada to include grounding clip, for example FD1RPGC.

### FEATURES AND BENEFITS

- Easiest and fastest installation of a device in a retrofit project
- Mounting wings hold bracket securely against wall when screws are tightened
- Finishes with any standard, mid size, or maximum wall plate
- 2 hour fire rating
- Secure and level device installation
- Includes an installed NM cable connector
- Textured paintable front surface
- Adjusts to fit 1/4" to 1-1/2" wall thicknesses
- Single-gang FD1RP installs with a 3.5" hole saw and 2-Gang FD2RP installs with a 4.5" hole saw

### INSTALLATION INSTRUCTIONS



**1** Determine box location. Cut opening with a hole saw; 3.5" for single-gang FD1RP, 4.5" for the 2-gang FD2RP.



**2** Pull cable(s) from behind the wall. (Easy cable access is another reason to use Arlington's FDRP boxes.)



**3** Push cable through connector. Insert box into the opening. (Shown with single-gang FD1RP)



**4** Level the box. Tighten the mounting wing screws to pull the box snug against the drywall.



**5** If desired paint front surface to match wall. Install device.



**6** Finish with any standard or mid size wall plate. (Front surface shown unpainted)



**FD2RP**  
Install complete!



Scan For Video

