





FBS428SC

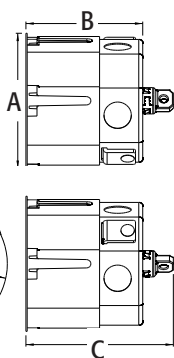

## Steel T-Box for Suspended Ceiling Grids

Can be positioned on the ceiling grid at the cross of the T-rails or on the straight away. For use on premium/reveal edge ceiling tiles, the box height adjusts by removing the tabs with pliers.

| CATALOG NUMBER | UPC/DCI/NAED MFG #018997 | DESCRIPTION                                 | UNIT PKG | STD PKG | DIM A | DIM B | DIM C |
|----------------|--------------------------|---|----------|---------|-------|-------|-------|
| FBS428SC       | 12782                    | Steel T-Box, For fans/fixtures up to 70 lbs | 1        | 10      | 4.312 | 3.728 | 4.706 |



### FEATURES AND BENEFITS

- UL Listed for fans/fixtures up to 70 lbs
- 30.5 cu. inch steel box includes Wire Grabber™ connector with braided drop wire for support
- Meets NEC, section 314.27 for fan and fixture boxes
- Uses include fans, fixtures, smoke and carbon monoxide detectors, security cameras, exit signs, and emergency lighting

### KIT INCLUDES

Wire Grabber™ with Braided Drop Wire Support Kit, (2) #10-32-32 x 4" screws, grid cover

### INSTALLATION INSTRUCTIONS



1a




1b

Locate position of item to install.

A = straight on T-bar rail B = intersection of T-bar rail



2a



2b

Cut out around ceiling tile: A = for straight B = for cross



3a



3b

Drop box onto grid from overhead. Remove tabs as necessary to adjust ceiling tile height. Install conduit with connector (not included). Install Wire Grabber connector. Attach drop wire to structural member. Reinstall ceiling tiles.

- 4** Install fan, fixture or other item per manufacturer's instructions.  
*Note: Install fan/fixture bracket with supplied screws.*



A Straight



B Cross

