




FBC4225BR



FBC4225W

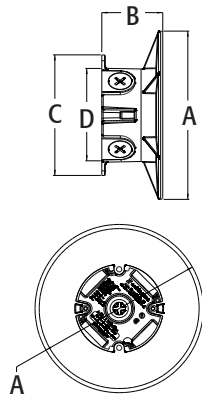

Non-Metallic Rainbox™

Rain tight labor saving solution to installing a fan or fixture exposed to the elements, inside or outside.

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	DESCRIPTION/ CU. IN.	UNIT PKG	STD PKG	DIM A	DIM B	DIM C	DIM D
FBC4225BR	09677	Bronze, non-metallic 21.0 cu. in. box	1	5	7.500	2.718	5.390	2.059
FBC4225W	09679	White, non-metallic 21.0 cu. in. box	1	5	7.500	2.718	5.390	2.059



PATENTED.

Refer to chart on page R-25 for load ratings and number of single conductors.


MADE IN USA.

FEATURES AND BENEFITS


- Available in white or bronze
- UL/CSA Listed, rain tight assembly
- Oversized medallion accommodates canopies up to 7" in diameter
- NEC code compliant. Completely sealed against water, dirt, and pests with no exposed wiring
- Safely supports a fan or fixture up to 70 lbs!

INCLUDES

21.0 cubic inch RAINBOX™, medallion, (2) 1/2" to 3/4" NPT reducing bushings, (4) plugs, (2) #8 x 1-1/4" screws for medallion, and (2) #12 x 4" screws for fan/fixture bracket.



INSTALLATION INSTRUCTIONS




1) Install fitting with conduit. Seal unused openings with supplied plugs. Mount box to structural member.



2) Pull wire (not included)



3) Attach medallion to box with supplied #8 x 1-1/4" screws.



4) Attach fan/fixture bracket to structural member using supplied screws (#12 x 4"). Connect wires and install fan/fixture per manufacturer's instructions.

