

## Floorbox Coverplate Two-Gang, Coin Style

AI CAT. #  
 FLB5540MB (BRASS)  
 FLB5540NL (NICKEL)


**WARNING:** Make sure power is OFF at main panel box before installing.


### INSTALLATION INSTRUCTIONS

1. Use with any approved 2-Gang box having a depth of 3-1/2"
2. Rough-in box should not exceed 4-1/4" x 3-1/2"
3. Secure electrical box with four screws through outside tabs. (screws not provided)
4. When attaching box to sub-floor, finish floor surface should be brought up to long sides of electrical box and within a 1/2" of mounting ears on short sides of box. **IMPORTANT:** Finished floor surface must cover outside tabs by a minimum of 1/4"
5. Wire receptacle in accordance with National (NEC/CEC), state/province, and local codes
6. Attach gasket support plates to receptacles with #6-32 x 1/2" long screws.
7. Place gaskets on top of gasket support plates.
8. Install coverplate using four #6-32 x 1-3/16 long screws.

If you have any questions or if parts are missing Please call our Customer Service Department at 1-800-233-4717. Do not call or return this product to your local store or distributor.

### Contents:

  
 #6-32 x 1/2"  
 LG. SCREWS

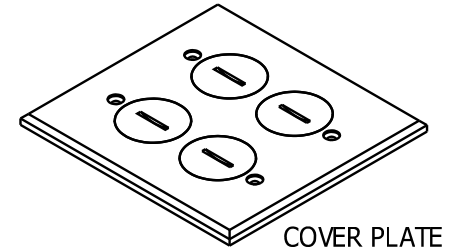

  
 #6-32 x 1-3/16"  
 LG. SCREWS

