Phone: 800-233-4717 Fax: 570-562-0646 www.aifittings.com E-mail: sales@aifittings.com

Arlington Industries, Inc.

1 Stauffer Ind. Park, Scranton, PA 18517

FLBC8510 COVER PLATE KIT

for GANGARI F FLOOP BOY




Arlington Cat. # FLBC8510NL (NICKEL) FLBC8510MB`(BRASS)

CONTENTS:


- (1) INSERT/LID ASSEMBLY
- (1) INSERT GASKET
- `(6) #6-32 x .75" SCREWS
- (1) 20 AMP DECORATOR RECEPTACLE
- 1) LOW VOLTAGE HOLDER
- (2) LOW VOLTAGE SPACERS
- (1) COVER PLATE
- (4) #6-32 x 1" SELF-THREADING **SCREWS**
- (1) FLOOR GASKET

FLBC8510 COVER PLATE for use with FLBC8500 GANGABLE FLOOR BOX.



All wiring must be according to National (NEC/CEC), State and Local Codes.

WARNING: Make sure power is OFF at main panel box before installing.

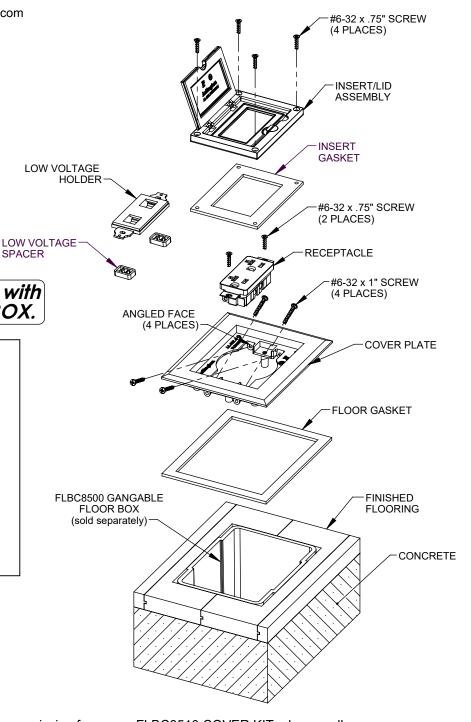

If you have any questions or if parts are missing from your FLBC8510 COVER KIT, please call our Customer Service Department at 1-800-233-4717. Do not call or return this product to your local store or distributor.

Installation Instructions

- Turn OFF power at MAIN PANEL BOX.
- Remove paper from adhesive side of FLOOR GASKET and adhere to underside of COVER PLATE.
 Install COVER PLATE into GANGABLE FLOOR BOX (sold separate), tighten (4) #6-32 x 1" SCREWS thru ANGLED FACE of COVER PLATE into FLOOR BOX. Do not overtighten.
- Wire RECEPTACLE or LOW VOLTAGE HOLDER according to NEC, State and Local codes and attach to COVER PLATE using (2) #6-32 x .75" SCREWS. Note: Place LOW VOLTAGE SPACERS on COVER PLATE ledge below LOW VOLTAGE HOLDERS before attaching screws.

SPACER

Place INSERT GASKET over secured RECEPTACLE or LOW VOLTAGE HÖLDER.
Place INSERT/LID ASSEMBLY onto INSERT GASKET and attach with (4) #6-32 x .75" SCREWS.

WARNING: Make sure power is OFF at main panel box before installing.

NOTE: All wiring must be according to NEC, State and Local codes.