



# Arlington Industries, Inc.


1 Stauffer Industrial Park, Scranton, PA 18517

www.aifittings.com E-mail: sales@aifittings.com


Manufacturer of Quality Electrical Products

## Installation for 35" Gard-N-Post Bollard Kit GPBK35


-----Caution-----Turn off Power-----




**#1** Pull wire through conduit with a minimum of 40" length to make connections. UF cable and/or conduit must be installed 18" minimum below ground level




**#2** Orient metal support post with Non-metallic post for proper location and direction of outlet device boxes

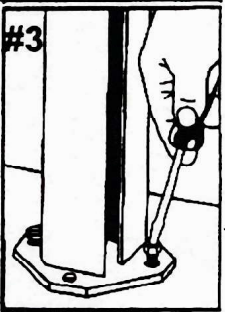


**#3** Install metal post. Recommended anchors (not included)  
**Concrete:** (4) 3/8" x 2-1/2" Tapcons™  
**Cast-In-Place Concrete:** (4) 3/8" anchor bolts. **Wood Deck:** (4) 3/8" bolts with nuts and washers

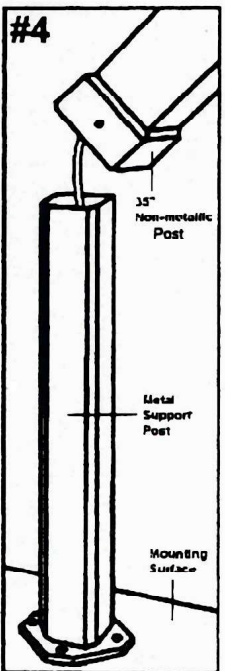


**#4** Slide the non-metallic post over metal support post.

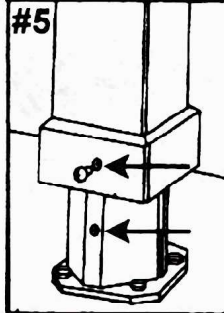


**#5** Line up holes in the post with those in the support post. Insert the supplied ((2) #14 X 3/4" phillips pan tapping screws).

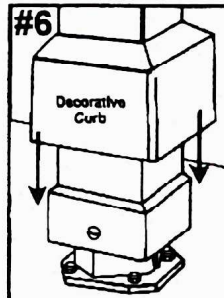


**#6** Place decorative curb over non-metallic post. Slide it to the bottom.




**#7** Caulk top rim of curb (clear type) optional (not supplied)



**#8** Install Knockout plate into bottom portion of side opening and secure with (2) #8 X 5/8" long flat head phillips drive screws. Use connectors to secure cable or conduit (not supplied)

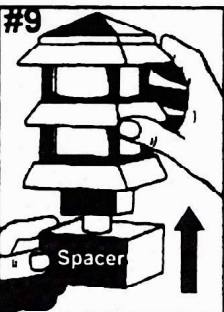

**#9** Install spacer to base of Lamp

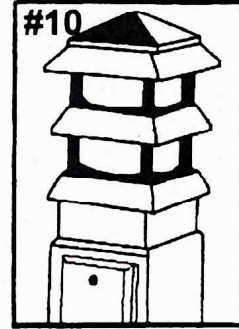

**#10** Install pagoda light to post with locking nut supplied with light. Install bulb (not included) by removing the 4 screws from the top of the light

### #11

#### CONNECT WIRES.

Refer to Pagoda light instructions. All ground wires are to be connected together including the green ground wire from metal support post.

All wiring to be according to NEC, State, and local codes.

The following components are included for the proper installation of the Bollard kit GPBK35B and GPBK35BR

- (1) non-metallic outer post
- (1) Metal support post
- (2) #14 X 3/4" Phillips Pan Head tapping screws
- (1) Decorative curb
- (1) Knockout plate with (2) #8 X 5/8" long flat head phillips drive screws
- (1) Spacer to fit bottom of pagoda light
- (1) Pagoda light with locking nut
- (2) Cover plates with (4) screws to cover outlet openings and gaskets
- (1) Steel grounding clip with ground screw (Only supplied with Canadian orders)
- (1) Low voltage separator (Use with power outlet on one side, low voltage outlet on remaining side)

Note: Use a maximum of 40 watt Halogen or 60 watt Incandescent, or 14 watt Fluorescent bulbs. Use smaller wattage bulbs for different lighting effects. (Bulbs not supplied).

If you have any questions or parts are missing from your GARD-N-POST™ kit, please call our Customer Service Department at 1-800-233-4717. Do not call or return this product to your local distributor.

