



Arlington Industries, Inc.

www.aifittings.com 800-233-4717

INSTALL ACCORDING TO
APPLICABLE LOCAL
ELECTRICAL CODE



SL2B18 Adjustable Bar Hanger w/ Two-Gang Box (12"-18" Stud Spacing)

SL2B24 Adjustable Bar Hanger w/ Two-Gang Box (15"-24" Stud Spacing)

Add 'GC' suffix for Canada (Ground Clip)

Contents:

Adjustable Bar Hanger (SL18 or SL24)


SLB102 2-Gang Box w/ (2) NM94 Fittings

(2) #8 x 3/4" Long Screws


Slider Clip

Flange Bent 90°
Ready to install

#8 x 1/2" Screw
(not included)

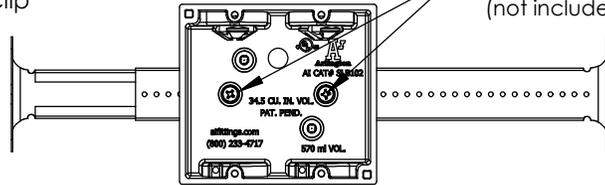

Direct Mount Shown

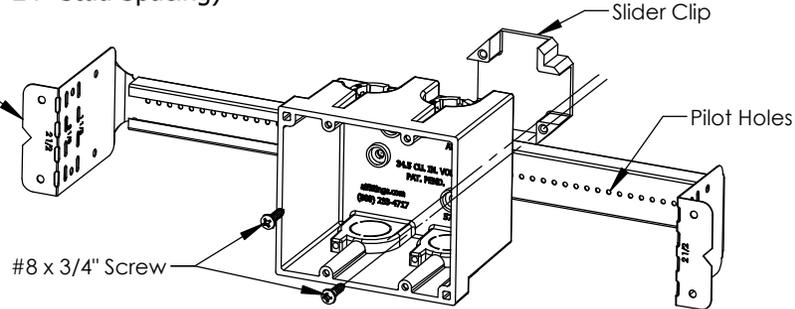

Slider Clip Mount Shown

Installation Instructions

1. Bend flanges at 2-1/2" mark when using 1/2" or 5/8" thick wallboard. Flanges can be bent 90° or bent back 180° if needed for an inside mount installation. Attach Bar Hanger to studs* with screws or nails (not provided)
2. Attach SLB102 Box to the Slider Clip using the (2) included #8 x 3/4" long screws. SLB102 Box can also be mounted directly to the SL18/SL24 Bar Hanger using (2) #6 or #8 x 1/2" long sheet metal screws (not provided). Install screws from the inside of the SLB102 Box into the pilot holes of the SliderBar. Holes are formed in the back of the SLB102 Box. Remove knockouts to access direct mount hole pattern.
3. Position the SLB102 Box at the desired location and tighten the screws to secure the box. Box can be installed anywhere along the length of the bar that has pilot holes.
4. Pull NM cable and install using included NM94 connector.
5. Wire devices according to all local, state, & national codes.

*SL2B24 is not for use with metal studs in Canada

If you have any questions or if parts are missing, Please call our Customer Service Dept. at 1-800-233-4717. Do not call or return this product to your local store or distributor.