
VARNING: TURN OFF POWER AT MAIN PANEL BOX



## Arlington Industries TVBS613 - TV Box for Use With Flat-Panel Televisions For New and Existing Construction

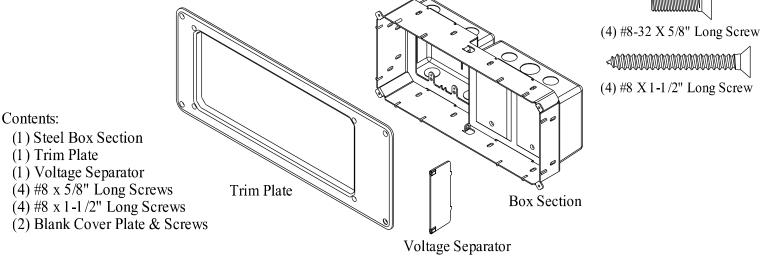

If you have any questions or if parts are missing from your TVBS613 TV Box For Flat Panel TV Kit, Please call our Customer Service Department at 1-800-233-4717. Do not call or return this product to your local store or distributor.

WARNING: Make sure power is OFF at main panel box before installing.

## **Installation Instructions:**

For NEW Construction: Mount Box Section to stud horizontally (can also be mounted vertically) using a minimum of (4) #6 x 1-1/2" long wood screws (not included) through slotted holes in side of box. Allow for wall finish thickness - such as dry wall.

- Install power and low-voltage cables.
- Install Voltage Separator, if using low-voltage and line-voltage in 2-Gang box.
- Install power and low-voltage wiring devices.
- After installation of dry wall (or other wall finish) install trim plate using (4) #8 x 5/8" long screws securing Trim Plate to Box, and (4) #8 x 1-1/2" long wood screws, securing Trim Plate to wall.

For EXISTING Construction: Cut 6" x 13-1/2" Hole Next to Stud.

- Attach Trim Plate to Box Section, Using (4) #8 x 5/8" screws.
- Install power and low-voltage cables.
- Mount box horizontally between (2) 16" centered studs using (4) holes in Trim Plate, secure to studs with (4) #8 x 1-1/2" Long Screws. Or Box can be mounted vertically by using a minimum of (4) #6 x 1-1/2 long screws (Not Included) through the slotted holes in wall of box to secure to stud.
- Install Voltage Separator, if using low-voltage and line-voltage in 2 gang box.
- Install power and low-voltage wiring devices.
- Complete wiring connections to all power and low-voltage devices.