






Easy Snap-in Insertion • No Tools...Saves Time



AT THE SAME COST PER CONNECTOR!

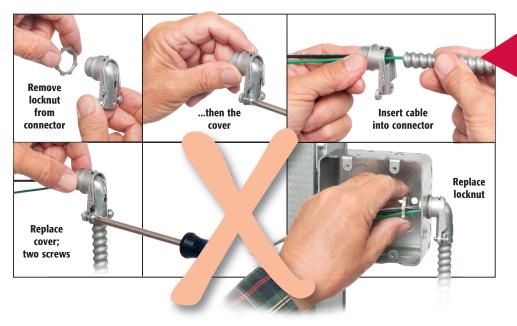

Arlington's one-piece **90 DEGREE SNAP²IT* fittings** make cable installation easier than ever.
And they handle the widest variety.

NO TOOLS! Easy snap-in installation.
Snap the fitting onto the cable.
Snap the assembly into the box.

Need some extra room for cable to round the curve inside the connector?

No problem!

Loosen the screw on the clip without removing it.

Insert the cable. Retighten the screw.

- Widest total cable ranges 14/2 to 10/3
- Widest variety of cables
 For AC, MC, HCF, MC continuous corrugated aluminum cable,
 MCI-A cables (steel and aluminum),
 AC90 and ACG90
- Secure installation No pullout
- Easy, screwdriver removal from box; connector is reusable



 Fully assembled – Ready to use with and without insulated throat


Eliminates
multiple steps of
2-screw connector




1 Stauffer Industrial Park Scranton, PA 18517 800/233.4717 Fax 570/562.0646 www.aifittings.com



BEND WIRES
AS SHOWN
FOR EASY
INSERTION







90° Snap2lt® Connectors with and without Insulated Throat

38900ST

CATALOG UPC/DCI/NAED NUMBER MFG #01 8997	CABLE TYPE	DIAMETER RANGE	CABLE RANGE	UNIT PKG	
3810900AST 36510 with	MC/HCF/AC Steel & Aluminum	.405 to .605	14/2 and 12/2	25	250
insulated throat	MCI-A Steel & Aluminum	.440 to .550	w/ and w/o ground 14/3, 14/4,		
and removable clip	AC90, ACG90	.440 to .550			
and remotable emp	Flexible Metal Conduit Steel & Aluminum (RWFMC)	3/8" Flex*	12/3, 12/4, 10/2		
4010900AST 04089	MC/HCF/AC Steel & Aluminum	.405 to .600	14/2	25	250
with	MCI-A Steel & Aluminum	.405 to .580	14/3, 14/4,		
insulated throat and removable clip	AC90, ACG90	.460 to .550	12/2		
and removable clip	Flexible Metal Conduit Steel & Aluminum (RWFMC)	3/8" Flex*	12/3, 12/4, 10/2		





Patent pending

	CATALOG NUMBER	UPC/DCI/NAI MFG #01 899
	38900ST	04098
00	38900AST with insulate	
	Tinted re	d inside fittir

40900ST

40900AST

with insulated throat

0.000	
oat	
ide fitting	
ide fitting	
04099	i
0.4000	
04092	
oat	
out	

Steel & Aluminum (RWFMC)

CABLE TYPE	DIAMETER RANGE	CABLE RANGE	UNIT PKG	STD PKG	
MC/HCF/AC Steel & Aluminum	.405 to .605	14/2 and 12/2	25	250	
MCI-A Steel & Aluminum	.440 to .550	w/ and w/o ground			
AC90, ACG90	.440 to .550	14/3, 14/4,	25	250	
Flexible Metal Conduit Steel & Aluminum (RWFMC)	3/8" Flex*	12/3, 12/4, 10/2			
MC/HCF/AC Steel & Aluminum	.485 to .610	14/3, 12/2 and 12/3	25	250	
MCI-A Steel & Aluminum	.480 to .580	w/ and w/o ground 14/4,			
AC90, ACG90	.480 to .550	12/4,	25	250	
Flexible Metal Conduit	3/8" Flex*	10/2, 10/3			

Republication Republication

1 Stauffer Industrial Park Scranton, PA 18517 800/233.4717 Fax 570/562.0646 www.aifittings.com 40900ST 40900AST

*CSA Listed w/ anti-short bushing ONLY