


IN/OUT BOX[®] for Ceiling Fixtures

Made in USA 

NEW!
Outlet boxes
on back

Adjustable Non-Metallic Box for New Construction

Easy Installation in New Construction

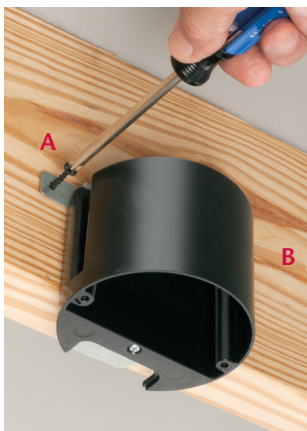

- 1 Install FA426 onto joist with a MINIMUM of four screws; (2) through front flange, (1) in each rear position. A, B, C, D above.



- 2 After installing the box on joist slide plastic insert into box. Pull NM cable through installed NM connector.




Catalog Number	UPC/DEI/NAED Mfg. #018997	Description	Size/Cu Inches	Unit/Std Pkg
FA426	40040	Adjustable Ceiling Fixture Box	Round 20.5 cu in	25/ctn
FA426GC	40041	Adjustable Ceiling Fixture Box w/ ground clip for Canada	Round 20.5 cu in	25/ctn

Includes (4) installation screws, NM cable connector
Pre-set for 1/2" wall thickness - Depth adjustment up to 1-1/2"

Arlington's IN/OUT BOX **for ceiling fixtures** adjusts up to 1-1/2" to accommodate varying ceiling thicknesses, like single or double drywall.

- Pre-set for 1/2" ceiling... Depth adjusts up to 1-1/2"
- Always accessible depth adjustment screw allows for depth adjustment of box before *or* after the ceiling is in place
- Complies with 2014 NEC, 314.20 for set back boxes
- Mounts securely to joist in new construction
- Listed for fixture support up to 50 lbs
- UL/CSA Listed

Depth adjustment screw



FA426
Adjustable Fixture Box

Patent pending

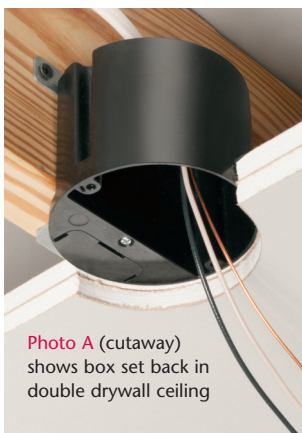


Photo A (cutaway)
shows box set back in
double drywall ceiling



Photo B
Box now
flush with
ceiling

- 3 After installation of wall board is complete use the depth adjustment screw to adjust position of FA426 box **if necessary** (see Photo B). FA426 adjusts up to 1-1/2" for ceiling thickness.



Arlington[®]

1 Stauffer Industrial Park
Scranton, PA 18517

800/233.4717



Fax 570/562.0646

www.aifittings.com




IN/OUT BOX[®] Adjustable OUTLET Boxes

Made in USA 

Adjustable Non-Metallic Outlet Boxes for New Construction

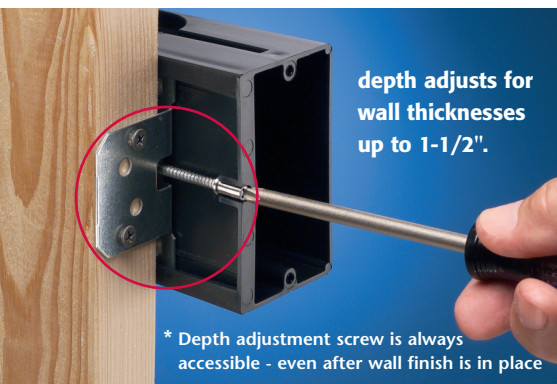

Catalog Number	UPC/DEI/NAED Mfg. #018997	Description	Number of Gangs / Cubic Inches	Unit/Std Pkg
FA101*	04241	Non-metallic box	Single/Vertical/21.0 cu in	25
FA101H*	11102	for 2x4 studs	Single/Horizontal/21.0 cu in	25
FA102*	04242	w/ depth adjustment up to 1-1/2" (pre-set for 1/2" wall thickness)	Two-gang / 43.5 cu in	10
FA103*	04243		Three-gang / 65.0 cu in	10
FA104	04244		Four-gang / 87.0 cu in	10




with Ground Clip for use in Canada

Catalog Number	UPC/DEI/NAED Mfg. #018997	Description	Number of Gangs / Cubic Inches	Unit/Std Pkg
FA101GC*	76881	Non-metallic box	Single/Vertical/21.0 cu in	25
FA101HGC*	11103	w/ depth adjustment up to 1-1/2" (pre-set for 1/2" wall thickness)	Single/Horizontal/21.0 cu in	25
FA102GC*	76883		Two-gang / 43.5 cu in	10
FA103GC*	76884		Three-gang / 65.0 cu in	10
FA104GC	76885		Four-gang / 87.0 cu in	10

Catalog Number	UPC/DEI/NAED Mfg. #018997	Description	Unit/Std Pkg
FA102D	04245	Low Voltage Divider for FA102, FA103, FA104	25



Optional FA102D low voltage separator for use with multiple gang IN/OUT BOX



Catalog Number	UPC/DEI/NAED Mfg. #018997	Description	Size/ Cu Inches	Unit/Std Pkg
FA101LP	76880	3.25" deep, Non-metallic low profile outlet box	Single-gang 18.3 cu in	25
FA101LPGC	76882	3.25" deep, Non-metallic low profile outlet box, with ground clip for Canada	Single-gang 18.3 cu in	25

w/ depth adjustment up to 1-1/2" (pre-set for 1/2" wall thickness)



1 Stauffer Industrial Park
Scranton, PA 18517
800/233.4717
Fax 570/562.0646
www.aifittings.com

FA426 1214/15M
Patent pending