## Fan/Fixture Box Kit for Suspended Ceilings





Kit includes box/bracket assembly with turnbuckle, 12' heavy-duty chain, and (2) "S" hooks.



## Designed just for

mounting a fan or fixture on a suspended ceiling grid, Arlington's FBRS420SC fan/fixture box kit saves money, and 30 minutes of installation time!

The box/bracket assembly ships with box mounted firmly on-center. There's no need to adjust the box or bracket if the box is installed in the center of a ceiling grid.

There are no parts to lose! FBRS420SC ships fully assembled. Installation screws ship parked in place.


- 2" deep, 20.0 cubic inch box
- Meets new UL standards
- UL rating: 70 lb fan or fixture CSA: Acceptable for fan support



1 Stauffer Industrial Park Scranton, PA 18517 800/233.4717 Fax 570/562.0646 www.aifittings.com

## Fan/Fixture Box Kit for Suspended Ceilings

## Ships Fully Assembled - Fully Adjustable Mounting Bracket

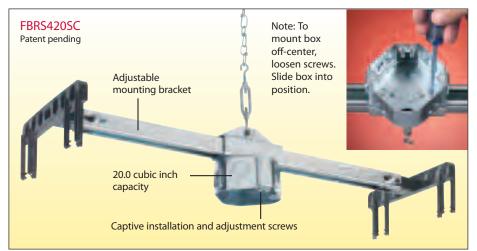



1 Cut a 4-1/16" diameter hole in the center of a 24" ceiling tile.

Kit includes box/bracket assembly with turnbuckle, 12' heavy-duty chain, and (2) "S" hooks.



2 Place box over hole. Snap plastic ends of



plastic ends of support bar over the ceiling grid (tees).




3 Use the "S" hooks provided to attach chain to turnbuckle, and chain to the overhead support. Use turnbuckle to apply tension to the chain, so it supports the weight of fan.



4 Remove captive screws (shown above). Use them to install the fan or fixture per manufacturer's specifications, NEC and all local electrical codes.



1 Stauffer Industrial Park Scranton, PA 18517 800/233.4717 Fax 570/562.0646



Cable pulled thr ough installed NM cable connector.



Distributed by

WWW.aifittings.com FBRS420SC 306/50M