
# Low Profile TV BRIDGE® KIT



### For Flush-to-the-Wall TV Installations on Walls as Shallow as 3/4"



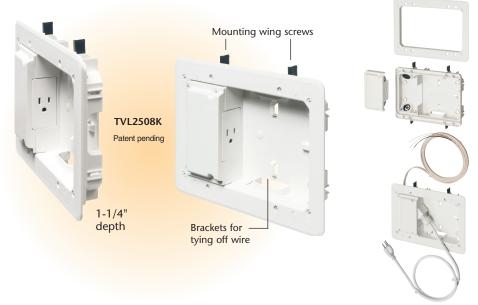

Save time and money with Arlington's TV Bridge® KIT with low profile boxes. This all-in-one package is ideal for flat screen TV installations on 1/2" or 5/8" drywall with wall cavity depths as shallow as 3/4".

Applications in new work or retrofit include:



- Furring strips on concrete block walls
- 2x2, 2x3 and 2x4 or larger studs

Using a low profile box is also helpful when plumbing or other obstructions run behind the wall.

Plus, there's lots of room inside for multiple cables, and brackets for tying them off.

- Plugs stay inside upper box so
  TV mounts closer to the wall
- Mounting wing screws hold boxes securely in the wall
- Kit includes all you need to install a flat screen TV close to a wall and connect it to additional components

Scan for Info





1 Stauffer Industrial Park Scranton, PA 18517 800/233.4717


Fax 570/562.0646 www.aifittings.com

## Low Profile TV BRIDGE® KIT



#### For Wall Cavities as Shallow as 3/4"


Installation of the TVL2508K Low Profile TV Bridge® Kit is quick and easy. Just cut two openings in the wall,



	1/2" Wallboard		
Catalog Number	UPC/DEI/NAEI Mfg. #018997	•	nit/Std Pkg
TVL2508K	52305	5" x 8" power/low voltage recessed TV Bridge Kit	1
TVL2508K	GC 52306	5" x 8" power/low voltage recessed TV Bridge Kit w ground clip for Canada	1



1 Stauffer Industrial Park Scranton, PA 18517 800/233.4717 Fax 570/562.0646 www.aifittings.com

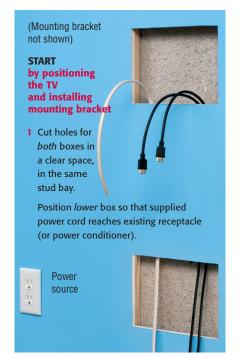



#### **UPPER Box** installation



4 Install trim plate. Pull cable through connector. To install box in hole tighten wing screws (see 3).



6 Attach receptacle mounting bracket to box.



5 Attach electrical receptacle to receptacle mounting bracket.



7 OPTION Attach box to block for added stability.



Scan for Info

TVL2508K



©2012 Arlington Industries, Inc. TVL2508K 1212/REV0913/15M