

NEW!
1" Bearing Surface

The HOOP™ High Speed Cable Ring

Non-Metallic

Listed

Protects Cable Against Damage




FOR USE IN ENVIRONMENTAL AIR HANDLING SPACES

The HOOP™ is easy to use and its smooth, non-metallic surface protects MC/AC and communications cable against damage – with no bending or kinking of cable.

It offers versatile **horizontal or vertical mounting**...ON a beam clamp, wood beam or threaded rod – or UNDER a beam clamp. Use it with threaded rod too.

The HOOP locks to hold cable securely in place. To add cable without bending or kinking, use a screwdriver to open the latch.


- For use with MC/AC and communications cable, *not to exceed load rating*
- Wider 1" bearing surface helps to reduce cable separation
- Costs less than bridle rings
- Available with or without built-in 1/4-20 screw
- Complies with EIA/TIA standards
- Listed for use in environmental air handling spaces per NEC code requirements
- cULus Listed

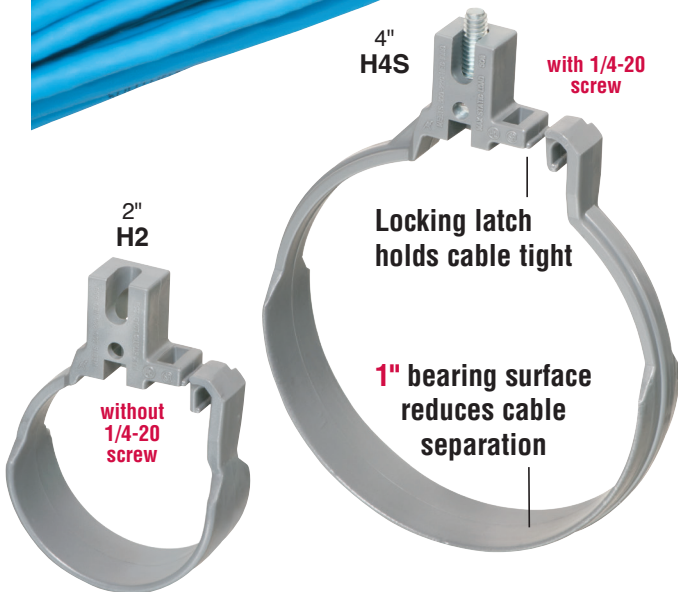

Mounts Cable Horizontally or Vertically
Available with or without 1/4-20 screw



Patent pending



Arlington®
1 Stauffer Industrial Park
Scranton, PA 18517
800/233.4717 • Fax 570/562.0646
www.aifittings.com

Catalog Number	UPC/DEI/NAED Mfg. #018997	The HOOP size High speed cable ring	Load Rating	Unit Pkg	Std Pkg
H2	50184	2"	25	100	100
H2S	50185	2" with 1/4-20 screw	25	100	100
H4	50186	4"	50	50	50
H4S	50187	4" with 1/4-20 screw	50	50	50

