





DSHB1C



25.0 cu. in.

Scan For Video



IN BOX FOR NEW BRICK INCLUDES

Metallic box with non-metallic, extra duty weatherproof in use cover; installed bug plugs; adapter sleeve; (1) standard duplex and (1) standard GFCI face plate; (1) set installation screws; (1) NM cable connector; an in place, disposable mud cover; and (1) roll of caulk.

Low Profile IN BOX® with Metal Box and Adapter Sleeve for New Brick Construction

Recessed, metallic electrical box with non-metallic, extra duty weatherproof in use cover for new brick. Includes a protective adapter sleeve that keeps mortar out. Accepts most single-gang wiring devices and uses standard indoor wall plates or a GFCI cover plate.

Non-metallic portion and covers are UV rated plastic for long outdoor life. Compatible with DBHC and DBHW extra duty replacement covers on K-17.

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	ORIENTATION	COLORS	UNIT PKG	STD PKG	DIM A	DIM B	DIM C	DIM D	DIM E
DSHB1C	43610	Horizontal	Clear Cover/White Box	1	4	4.937	7.196	5.283	1.283	4.000
DSHB1W	43611	Horizontal	White Cover/White Box	1	4	4.937	7.196	5.283	1.283	4.000
DSHB1BRC	43612	Horizontal	Clear Cover/Brown Box	1	4	4.937	7.196	5.283	1.283	4.000
DSHB1BR	43613	Horizontal	Brown Cover/Brown Box	1	4	4.937	7.196	5.283	1.283	4.000



E170558 LR49636

PATENTED.

MADE IN USA.

ADDITIONAL PATENTS PENDING.

Note: Meets 2021 NEC section 406.9 (B) for the protection of exterior outlets where an extra duty weatherproof in use cover is required for 15 or 20 AMP receptacles installed outdoors.


FEATURES AND BENEFITS

- For use with metal raceway systems
- IN BOX® replaces the installation of an electrical box and bubble cover assembly
- Installs in the wall, so less of it shows outside
- Install option: Cover is removable for easier device installation
- White, non-metallic portion and white cover are textured/paintable
- Grounding wire provided
- No gaskets required
- Weatherproof in use
- Extra duty



Bug Plugs ship installed in all IN BOX styles to seal unused cord hole openings.

INSTALLATION INSTRUCTIONS

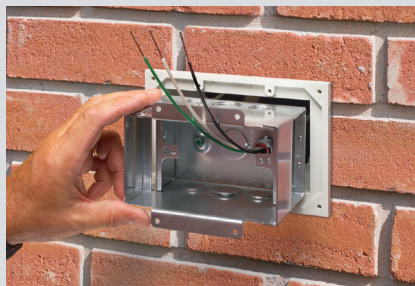

DSHB1BRC shown.



IN BOX Saves Time. Looks Great!

