


DBVMA1W

22 cu. in.



Scan For Video

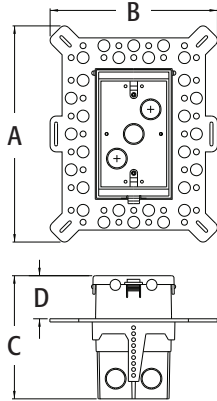

IN BOX FOR FOAM WALL SYSTEMS INCLUDES

Box with extra duty weatherproof in use cover, installed bug plugs, (1) standard duplex and (1) standard GFCI face plate, (4) installation screws, (1) NM cable connector, and an in place, disposable mud cover.



Bug Plugs ship installed in all IN BOX styles to seal unused cord hole openings.

Low Profile IN BOX® for Foam Wall Systems

Recessed electrical box with extra duty weatherproof in use cover. Adjustable to fit any foam board thickness. Non-metallic cover and base. Accepts most single-gang wiring devices and uses standard indoor wall plates or a GFCI cover plate. Box and white cover are textured/ paintable. UV rated plastic for long outdoor life. Compatible with DBVC and DBVW extra duty replacement covers on K-17.

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	ORIENTATION/COVER COLOR	UNIT PKG	STD PKG	DIM A	DIM B	DIM C	DIM D MIN / MAX
DBVMA1C	77632	Vertical/Clear	1	4	9.058	7.012	5.160	.250 - 5.000
DBVMA1W	77634	Vertical/White	1	4	9.058	7.012	5.160	.250 - 5.000



PATENTED.

MADE IN USA.

Note: Meets 2021 NEC section 406.9 (B) for the protection of exterior outlets where an extra duty weatherproof in use cover is required for 15 or 20 AMP receptacles installed outdoors. Add suffix "GC" to Catalog # when ordering in Canada, for example DBVMA1CGC.

ADDITIONAL PATENTS PENDING.

FEATURES AND BENEFITS

- IN BOX's one piece assembly replaces the installation of an electrical box and bubble cover assembly
- Adjustable flange depth fits any foam board thickness or custom finish in concrete block and stucco applications
- Adjustable to fit ANY foam board (2-3/4" to 5" wall), or custom stucco finishes from 1/4" to 2-1/2" thick
- No gaskets required
- Install option: Cover is removable for easier device installation
- Installs in the wall, so less of it shows outside
- Weatherproof in use
- Extra duty



INSTALLATION INSTRUCTIONS