

Non-Metallic Vapor Barrier Cover For Non-Metallic or Steel Boxes



Designed for new work, Arlington's vapor barrier covers prevent air infiltration around single, two- and three-gang device boxes, as well as round and octagonal ceiling boxes – without the need for a gasket.

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	DESCRIPTION	UNIT PKG	STD PKG	DIM A	DIM B	DIM C	DIM D
VB1	16430	1-Gang	20	20	6.313	4.059	4.875	.570
VB1	16300	Fits ROUND or OCTAGONAL single gang plastic or steel box	20	20	3.375	2.718	3.500	---
VB2	16435	2-Gang	10	10	6.313	4.059	6.687	.570
VB3	16436	3-Gang	10	10	8.499	6.150	6.313	.570



MADE IN USA.


Refer to L-8, Q-4, R-2, and R-3 for additional Vapor Boxes.

FEATURES AND BENEFITS

- Comes with #6-32 x 3/4" long screw
- Non-metallic boxes fit single 1/2" or 5/8" drywall
- NEMA OS-4 certification when caulking is applied around NM cable when installed
- Nails ship captive, plugs and NM cable are supplied (not installed)
- 2 hour fire rating





INSTALLATION INSTRUCTIONS

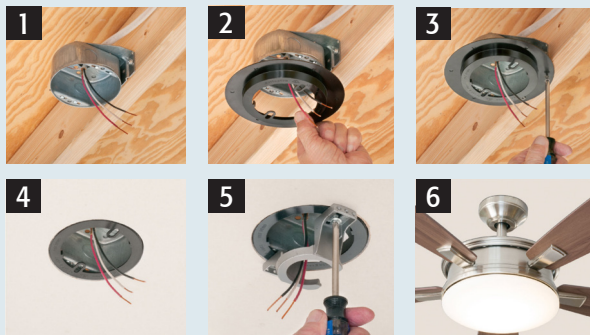

- 1) VBR1 covers a round or octagonal plastic or steel ceiling box.
- 2) Attach VBR1 to box with #8-32 screws you supply...
- 3) ...through the device holes or flashed over holes to hold it in place during drywall installation.
- 4) Install drywall.
- 5) After drywall installation, install fixture or fan bracket per manufacturer's instructions.
- 6) Finished fan installation.



VB1



VBR1

