

Extra Deep Fan & Fixture Mounting Box

Our deepest L-shaped fan/fixture box mounts securely to single or double joists with a shipped in place center screw.

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	DESCRIPTION / CU. IN.	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
FB444	72187	For 1/2" or 5/8" drywall 25.6 cu. in.	25	25	5.330	4.000	4.716



PATENTED.
MADE IN USA.

Note: Install fan or fixture (not included) in accordance with manufacturer's instructions and all local applicable electrical codes, using the parked screws provided. Refer to chart on page R-25 for load ratings and number of single conductors.

FEATURES AND BENEFITS

- Locator posts assure proper positioning of fan/fixture bracket
- Fan/fixture installation screws are parked, ready for easy fan/fixture bracket installation!
- UL rated: 70 lb fan, 200 lb fixture; CSA rated: 50 lb fan/fixture
- No loose parts to misplace, totally self contained!
- Arlington's deepest fan box!
- 2 hour fire rating
- Easy wire access

FAN/FIXTURE BOX INCLUDES

A ready to tighten center screw, installed NM cable connector, mud cover, multiple KOs, and two screws for fan/fixture bracket installation (screwed in place until removed by installer).





INSTALLATION INSTRUCTIONS



- 1) Position box alongside joist. Tighten center screw, mounting box to joist.
- 2) Position mounting bracket over locator posts to assure proper position.
- 3) Remove captive bracket installation screws. Use them to mount fan/fixture bracket.

OPTIONAL

- If necessary the bottom of the box can be opened to access wires.
- 4) Pull wires through knockout. (Installation of drywall not shown.)

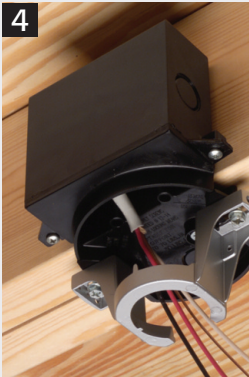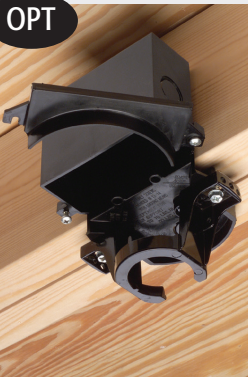

Locator posts for positioning of bracket installation screws

