

## Steel Adjustable Bracket with Non-Metallic Box

Low cost economical steel fan/fixture bracket with non-metallic box delivers super secure and versatile on center mounting between joists 16" to 24".

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	DESCRIPTION / TRADE SIZE	UNIT PKG	STD PKG	DIM A
FBR423	52310	Non-metallic box with adjustable steel bracket/23 cu. in.	1	10	2.548



**PATENTED.**  
**MADE IN USA.**

Refer to chart on page R-25 for load ratings and number of single conductors.

### FEATURES AND BENEFITS

- UL rating:  
@ 24" on center: 70 lb fan, 90 lb. fixture  
@ 16" on center: 70 lb fan; 150 lb fixture  
CSA rating: 50 lb fan or fixture
- Fan/fixture installation screws ship captive
- Bracket ends adjust for flush installation on ceilings up to 1-1/4" thick
- 23.0 cubic inch non-metallic box
- 2 hour fire rating

### INCLUDES

Installed NM cable connector, mud cover, multiple KOs, four installation screws parked in place (ready for installer), and two screws for fan/fixture bracket installation (screwed in place until removed by installer).

### INSTALLATION INSTRUCTIONS



Bracket mounts securely to joists.




Loosen center screw to position box on bracket.



Bracket ends are pre-set for a 1/2" ceiling. For other ceiling depths, bend the bracket ends along the appropriate score line.



Scan For Video

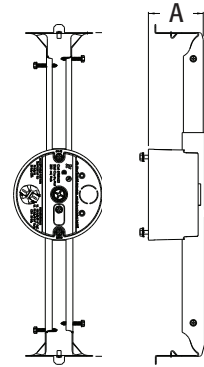

For Joist or Rafters 16" to 24" on center