



All wiring must be in accordance with National (NEC/CEC), State and Local Electrical Codes.

AI Cat# Color FLBC4560DBL (BLACK) FLBC4560DBR (BROWN) FLBC4560DCA (CARAMEL) FLBC4560DGY (GRAY) FLBC4560DLA (LIGHT ALMOND) FLBC4560DMB (BRASS) FLBC4560DNL (NICKEL)

#8 X 5/8" LG

GASKET

BLANK COVER

LEVELING RING

LOW VOLTAGE **DIVIDER** 


ASSEMBLY

## **FLBC4560**

Recessed Floorbox Kit w/ Decorator Style Receptacle

## Contents:

- (1) Leveling Ring Assembly w/ Carpet Flange, Funnel & UL Listed 15 A Decorator Style Receptacle
- (1) Low Voltage Divider
- (1) Blank Cover w/ Gasket
- (1) In-Use Cover
- (1) Low-Voltage Plug
- (3) #8 x 5/8" Lg. Flat Head Screw

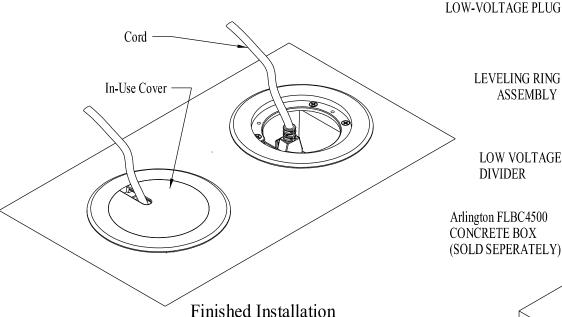

If you have any questions or if parts are missing from your FLBC4560, Please call our Customer Service Department at 1-800-233-4717. Do not call or return this product to your local store or distributor.

## **Installation Instructions:**

- 1. Use saw to cut installed FLBC4500 concrete box to finished floor height after concrete has cured.
- 2. If low-voltage partition is to be used, cut same amount from the bottom of divider as was removed from the concrete can.
- 3. Wire receptacle. All wiring to be per applicable National, State & Local Codes.
- 4. After installation of finished flooring, secure leveling ring assembly to installed FLBC4500 Concrete Can using PVC cement.
- 5. Option #1: Install Gasket & Blank Cover with (3) supplied #8 x 5/8" long flat head machine screws Option #2: Install In-Use cover... No screws required. Store Blank Cover with screws and gasket for future re-use