

Steel Snap2It® Connectors

Made in USA 

NEW!
more on
reverse

Easy Snap-in Installation • Economical • 3/8" Trade Size




Arlington's new Snap2It® **steel** connectors offer easy, secure installation. Just push the cable into the connector and rotate it clockwise.

Available in 3/8" trade size, both connectors install into a 1/2" knockout, and accommodate steel and aluminum AC, HCF, MCI and MCI-A cable. The tinted 40STS has more room inside for easier cable insertion.


In Canada both connectors are Listed for use with AC90 and ACG90 cable.

- Tested to UL 514B and Listed to meet UL ground fault requirements
- **Removable**
Unscrew the connector counter-clockwise to remove it *from the cable*. Remove the connector *from the box* using a flat blade screwdriver to release the snap tangs from the inside of the box while pulling the connector out of the knockout.
- **One piece design** – ready to use
- Bulk packaged in convenient 200-piece cartons
- cULus Listed


Patented.
Other patents pending.

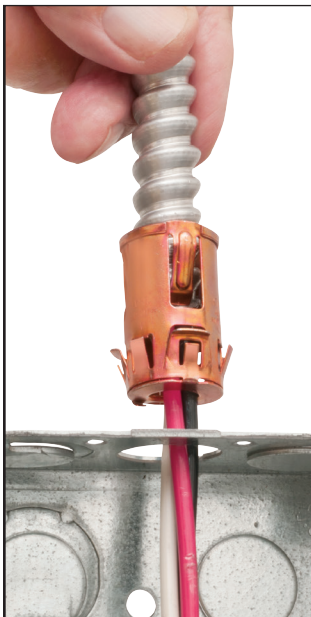

Easy Snap-in Insertion

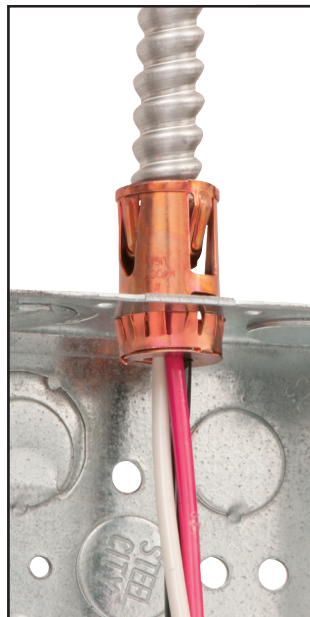

**Secure Hold
NO PULLOUT**

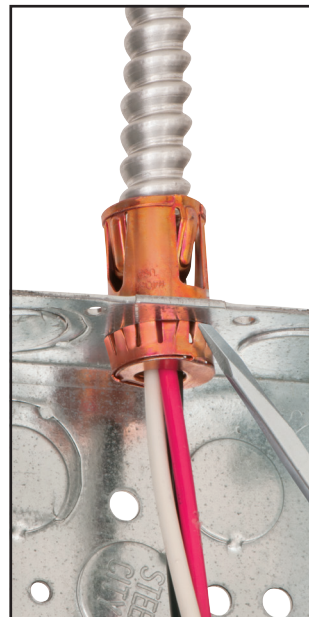

**Easy Screwdriver
Removal
NO SPECIAL TOOL**






Arlington®



1 Stauffer Industrial Park
Scranton, PA 18517
800/233.4717 • Fax 570/562.0646
www.aifittings.com



Steel Snap2It® Connectors

Secure Snap-in Installation • Economical • 3/8" Trade Size

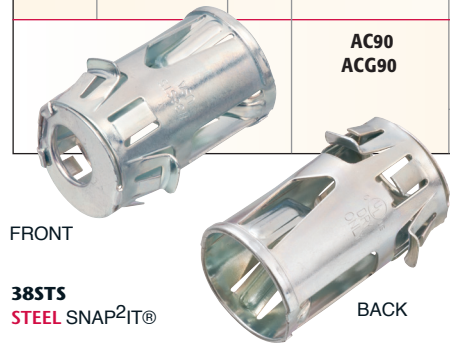CATALOG NUMBER	UPC/DCI/NAED MFG. #018997	TRADE SIZE	CABLE TYPE STEEL & ALUMINUM	CABLE RANGES			STD PKG
38STS	13540	3/8"	AC HCF MCI MCI-A	14/2 w/ ground	12/2 w/ ground	10/2 w/ ground	200
				14/3	12/3	10/3	
				14/2	12/2	10/2	
				.405" Dia. Minimum to .605" Dia. Maximum			
			AC90 ACG90	14/2 w/ ground	12/2 w/ ground	10/2 w/ ground	
				14/3	12/3	10/3	
				14/2	12/2	10/2	
				.450" Dia. Minimum to .550" Dia. Maximum			



CATALOG NUMBER	UPC/DCI/NAED MFG. #018997	TRADE SIZE	CABLE TYPE STEEL & ALUMINUM	CABLE RANGES			STD PKG
40STS	22104	3/8"	AC HCF MCI MCI-A	12/2 w/ ground	10/2 w/ ground		200
				12/3	10/3		
				12/2	10/2		
				.480" Dia. Minimum to .605" Dia. Maximum			
			AC90 ACG90	12/2 w/ ground	10/2 w/ ground		
				12/3	10/3		
				12/2	10/2		
				.480" Dia. Minimum to .560" Dia. Maximum			

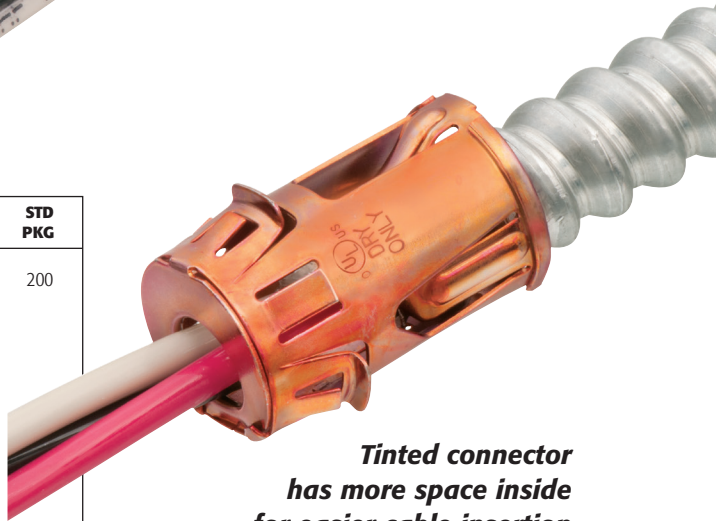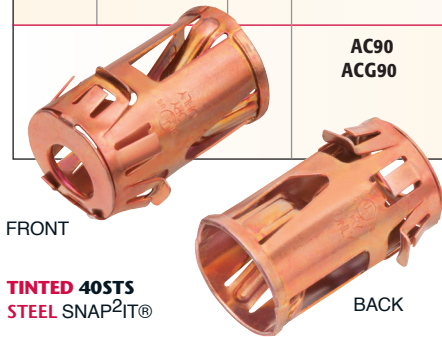

Patented.
Other patents pending.

Arlington®

1 Stauffer Industrial Park
Scranton, PA 18517
800/233.4717 • Fax 570/562.0646
www.aifittings.com

Distributed by